

Steps to Configure a Cisco MPP 8841 for use with a Remote or Home Network


The following steps will allow you to program a Cisco MPP 8841 for use with non-Evolve IP managed remote or home network. Steps will include pointing the phone to the provisioning server and disabling the VLAN settings.

Click [here](#) if you need the steps to Reset the Cisco MPP 8841 to Factory Default


Step 1: Press the 'Applications'  button to access the phone settings menu




Step 2: Press the '5' button to select the 'Device administration' menu

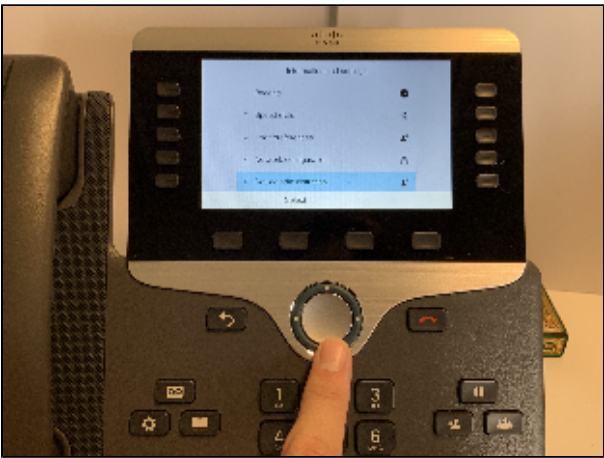


Step 3: Press the '6' button or arrow down and select 'Profile rule'

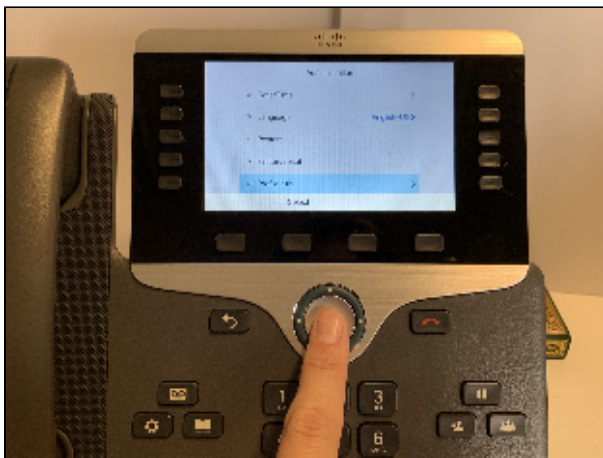


Step 4: use the keypad to type in the Cisco Provisioning Server Path in the profile rule field
Server Address: <https://pconf.evolveip.net/fs/cisco-provisioning.xml>

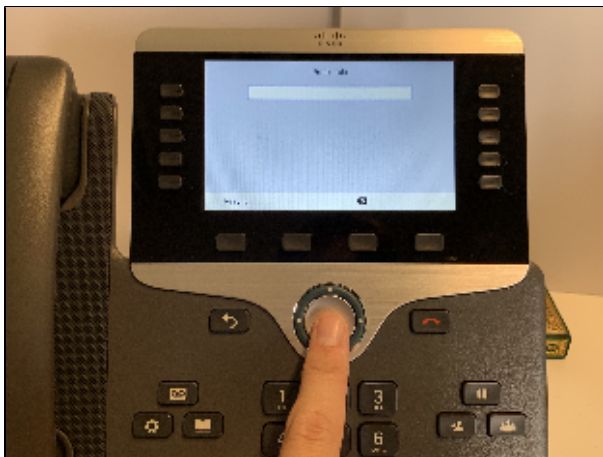


Step 5: Press the softkey labeled 'sync' to save the profile rule

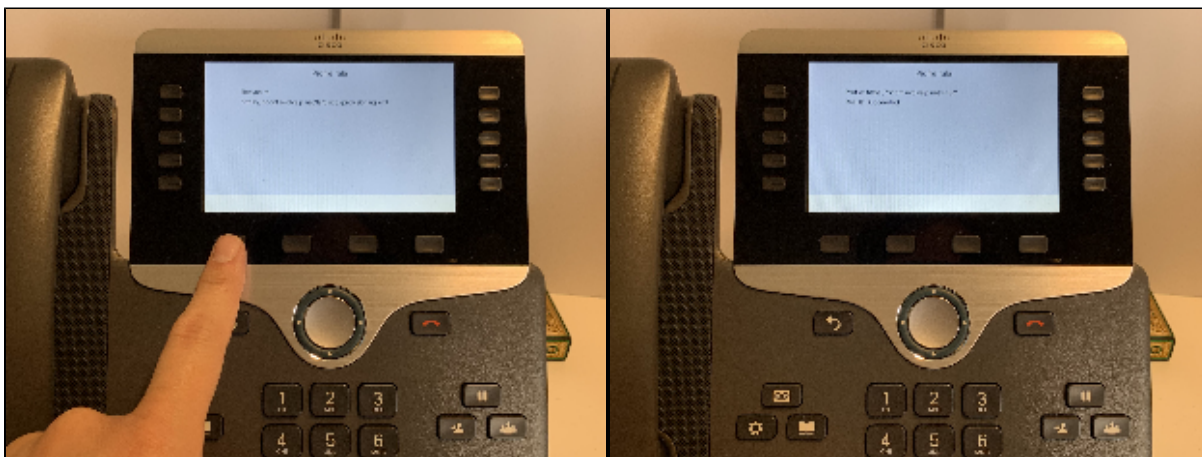


Step 6: Press the 'Applications'  button to access the phone settings menu

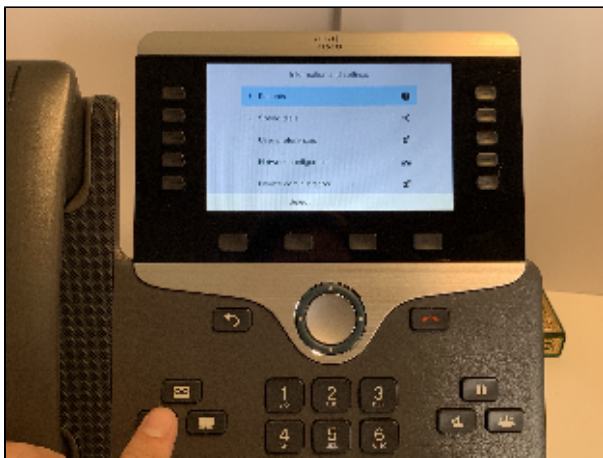

Step 7: Press the '4' key or arrow down to select the 'Network configuration' menu

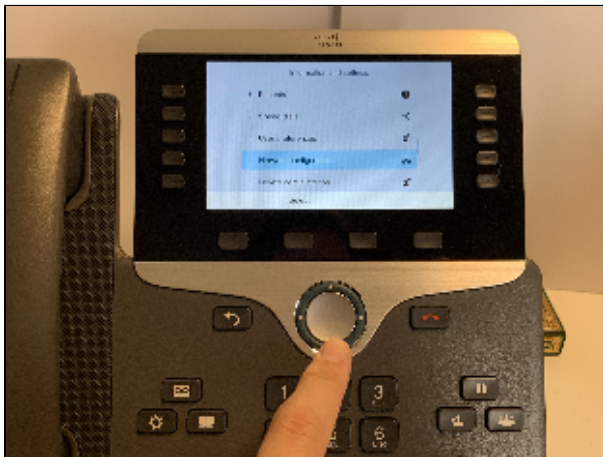

Step 8: Select 'Ethernet configuration'

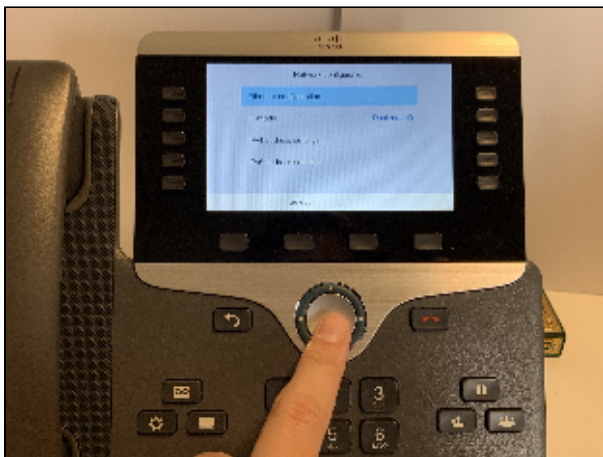

Step 9: Arrow down and select 'VLAN' and set it to OFF by pressing right on the directional pad

